

DMB03

Large LED Double Color Scale Display




APPLICATIONS

Features

- High brightness color LED scale
- Convert quantity via RS485
- Light volume and easily install (Wall/ suspended installation type)
- Double line character / Color recognition function / Emoticons warning function
- Display CO2, temperature and humidity values

Applications


- Monitor environment for Industrial Process / Plant / IDC / Clean room / Laboratory / Agriculture
- Storage / Hospital / Department store / Office building / Hotel / Restaurant / Library / Banks

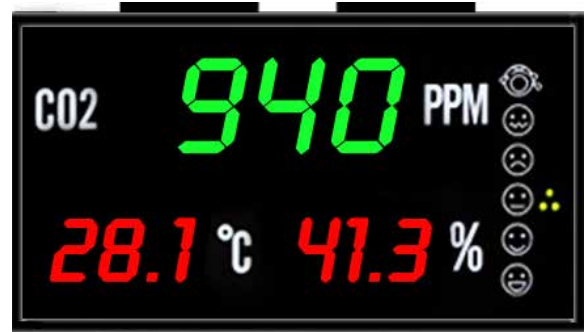

EMOTICON

Emoicon	Statement	CO2 value
	It is not allowed to stay here for more than 8 hours.	5000PPM
	It is not healthy.	2500PPM
	It would make body fatigue.	1000PPM
	People would feel dirty air and uncomfortable.	700PPM
	It is within acceptable range.	450PPM
	It is as general outdoor air level.	350PPM

CONNECTION DIAGR

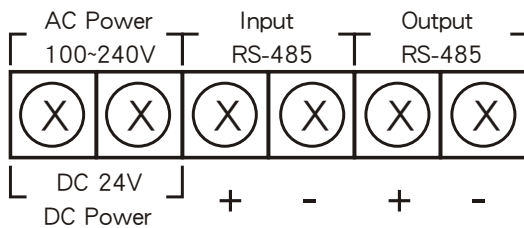

TECHNICAL SHEET

Input Analog & RS-485
 Output RS-485(Modbus RTU mode)
 Display CO2 green 2.3" (5.8cm) LED
 °C, % red 1.5" (3.8cm) LED
 Dimension 375mm(L) X 200mm(W) X 60mm(D)


*combination with EYC GTH03 CO2 Temperature & Humidity Transmitter

SETTING CONNECTIC



GTH03 setting connection :

1. Port No.: No.34
2. Open Jumper

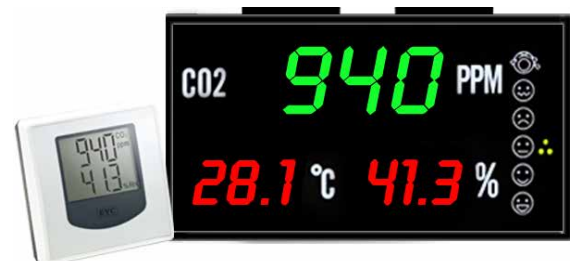

↑ GTH03 CO2 Temperature & Humidity Transmitter (left) can use with EYC DMB03 Large LED Double Color Scale Display.