




# FUM06 Ultrasonic Flowmeter

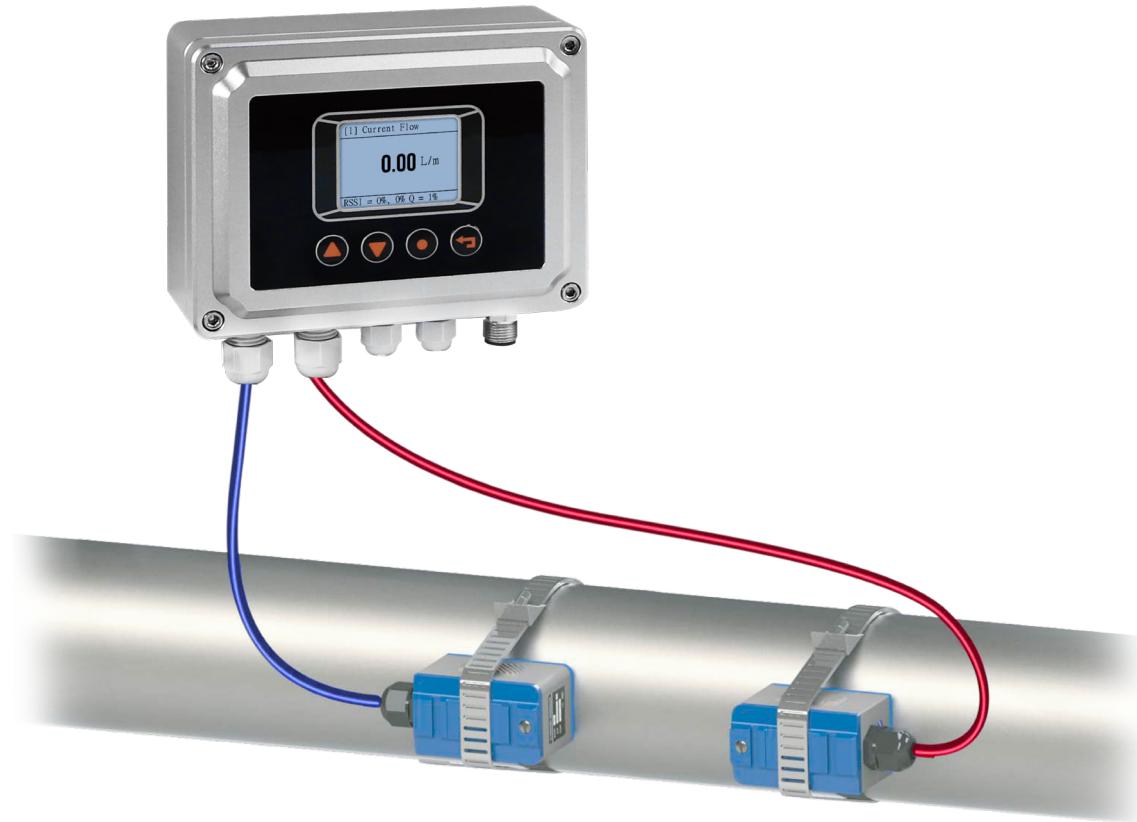

## | Features |

- With ultrasonic technology, it can accurately measure the flow rate of 0.1 m/s.
- Wide measurement range (DN50 ~ DN300), easy installation
- 2" LCD color screen displays flow rate and flow, easy to set with buttons
- Installed on the measuring pipe, the two are connected with a special cable and can be used with a temperature meter for measurement

## | Applications |

Process / Energy-saving monitoring in industries such as petrochemicals / Water conservancy / Metallurgy / Chemistry / Machinery energy saving

## | Specification |

### Input

Sensor type	Ultrasonic time difference	Communication methods & protocol	RS-485 Modbus RTU
Turndown ratio	100 : 1	RS-485 baud rate	9600、19200、38400、57600、115200 bps
Measuring range	0.1 ... 10 m/s		
Transducers	TM-1, cable 10 m		

### Output

Output signal	4 ... 20 mA / 0 ... 10 V / RS-485	Electrical	
Temp. measurement	Can connect Pt1000 thermometer (RS-485 reading)	Power supply	DC 24 V ±10%
Load resistance	Current output : $\leq 500 \Omega$	Current consumption	24 V : 110 mA
	Voltage output : $\geq 10 \text{ k}\Omega$	Electrical connection	M12 5P connector

### Accuracy

Accuracy	±1% F.S.	Straight pipe	Transmitter installation should be satisfied : upstream 10 D, downstream 5D, 30D from the pump
----------	----------	---------------	--


### Display

Display readout	-99.99 ... +99.55 (Flow rate) 0 ... 9999999(Flow)	Pipe installation condition	
Decimal point	Button	Pipe material	Steel, Stainless steel, Cast iron, Copper, PVC, Aluminum, Fiberglass
Sampling time	1 cycle/sec	Straight pipe	Transmitter installation should be satisfied : upstream 10 D, downstream 5D, 30D from the pump
Unit	m/s、ft/s、L/min、CMM、CFM、CFH	Installation	Clamp type
Response time	1 sec	Pipe diameter	DN50 ... DN300

### Environmental


Operating Temp. & Humid.	0 ... 50°C / 20 ... 85%RH (Non-condensing)	Certification	
Storage Temp.	-25 ... 60°C	Certification	CE
Transducers Temp.	-30 ... 90°C	Protection	
Medium	Water, Sea water, Alcohol, Acetone, Methanol, Ethanol, Acetaldehyde, Peanut oil, Glycerin, Benzene, Toluene, Ethylbenzene, Petroleum, Pine oil, Ketone, Ethylene glycol	IP rating	IP65 (Housing)
		Electrical protection	■ Reverse polarity ■ Over-voltage

## | Diagram |

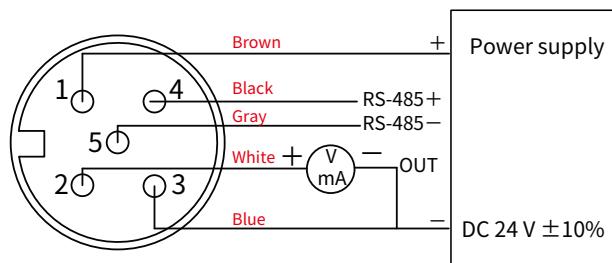

\*Please make sure the product and the device which connect with RS-485 are on common ground, avoid damaged product.

## | Dimension | Unit:mm

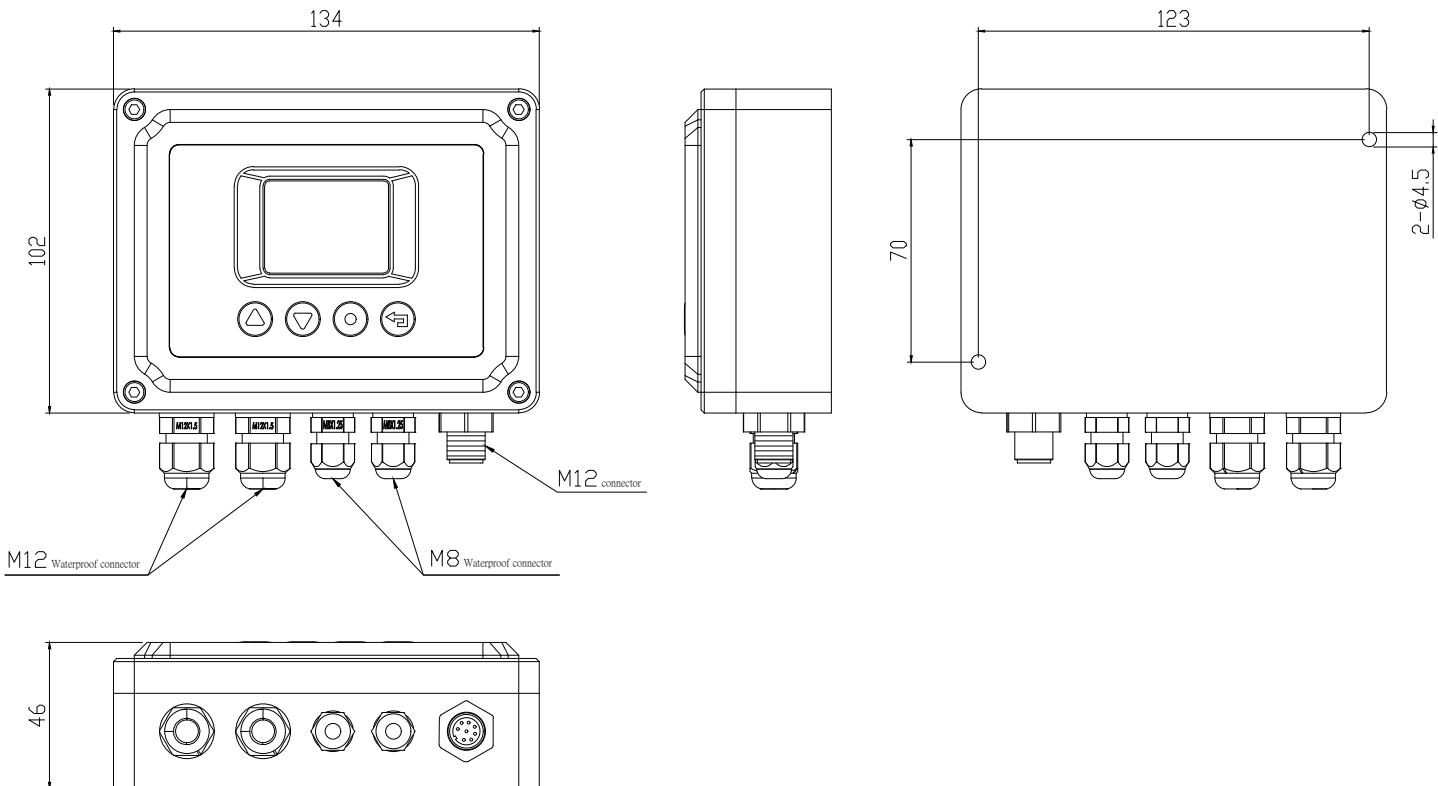

## | Clamp on type tranceducer |

Picture	Measurement range	Temperature	Dimension
	DN50 ... 300	-30 ... +90°C	64x39x44 mm

## | Temperature transducer |

Picture	Measurement range	Temperature	Installation requirements	Accuracy
	< DN50	-40 ... +160°C	No need to interrupt flow	100°C ± 0.8°C Tempe. difference ≤ 0.1°C after precise matching

## | Ordering Guide |

Product ordering number	Product Specifications
FUM06-TM1-DM300-10-N-N	TM-1 clamp on type tranceducer, cable : 10 m
FUM06-TM1-DM300-10-PT-N	TM-1 clamp on type tranceducer, cable : 10 m, Pt1000 patch type surface thermometer